

KING-GAGE®

Analog Set Point Controller

Tank Liquid Level

Inventory Monitoring

Process Integration

Multi-Point Process Switch

- 4 Adjustable Set Points
- Controls Simple Process Functions
- Independent SPDT (Form C) Relays
- For Process Transmitters with 4-20 mA Output

Multi-Point Process Switch is a single channel analog set-point control. It provides continuous monitoring of a typical process loop with four (4) independent set-points that are user adjustable over the full range. The process Switch may be used in conjunction with any process transmitter (i.e., pressure, level, temperature) that incorporates a two-wire, 4-20 mA output.

SPDT Relay Output

Control output relays are included for each set-point. During operation, the relay is energized once the milliamp value is exceeded. Both normally-open (N.O.) and normally-closed (N.C.) contacts are provided with the Form-C type relays. These SPDT relays are rated 3.0 Amps @ 115 Vac.

Adjustable Deadband Range

An integral deadband is selectable for the set-point values offering up to 12.5 % F.S. adjustability. This deadband is adjustable for the set-points as a group (i.e., not independently adjustable for each set-point). The Multi-Point Process Switch is factory preset with a nominal 1% F.S. deadband.

Automatic Overload Reset

This unit features protection against input circuit overloads and automatically resets when current level drops. Using advanced PTC resistor technology, the protection circuit trips whenever the signal input current exceeds 70 mAdc.



**Model 5880-1
Process Switch**

Process Applications

The Process Switch can be used to control continuous process operations, provide fail-safe limiting or alarm functions. In a level application, the switch can be used to actuate pumps, outlet valves or even to initiate CIP cycles. The Multi-Point Process Switch can monitor process variables within any industrial control environment.

MULTI-POINT Process Switch offers greater accuracy than conventional alarm trips. Monitors and triggers simple process functions more easily as compared to PID controllers, PLCs or other logic devices.

Input Current Limiting

A positive temperature coefficient (PTC) resistor circuit is incorporated into the Process Switch for protection against overcurrent situations. This thermal resistor undergoes increased orders of magnitude in resistance when an input current ≥ 70.0 mA_{dc} heats it above a certain point. In the switched state, a latched high-resistance limits current to no more than a few milliamps.

The resistor circuit resets automatically, permitting normal current flow once the input drops below 70 mA_{dc}. (NOTE - Protective resistor circuit is rated for 30 trip/cycles max.)

Diagram of Typical Process Loop

Voltage supply ($+V_A$) provides power to process transmitter which outputs 4-20 mA signal through the loop.

Process Switch is wired into loop to receive signal. Internal PTC resistor provides overcurrent protection by limiting input through high-resistance.


(See "Input Current Limiting ")

4-20 mA Input Signal


The Multi-Point Process Switch is a single channel analog set-point control. It provides continuous monitoring of a typical process loop with four (4) independent set-points that are user adjustable over the full input range. The Process Switch accepts any proportional, externally-powered two-wire 4-20 mA_{dc} current loop from any typical process transmitter (level, pressure or temperature).

Unit must be wired in series with transmitter to maintain proper polarity at the + and - terminals. See Diagram.

Internal input resistance of the Process Switch is 132 ohms (nominal) during normal operation.

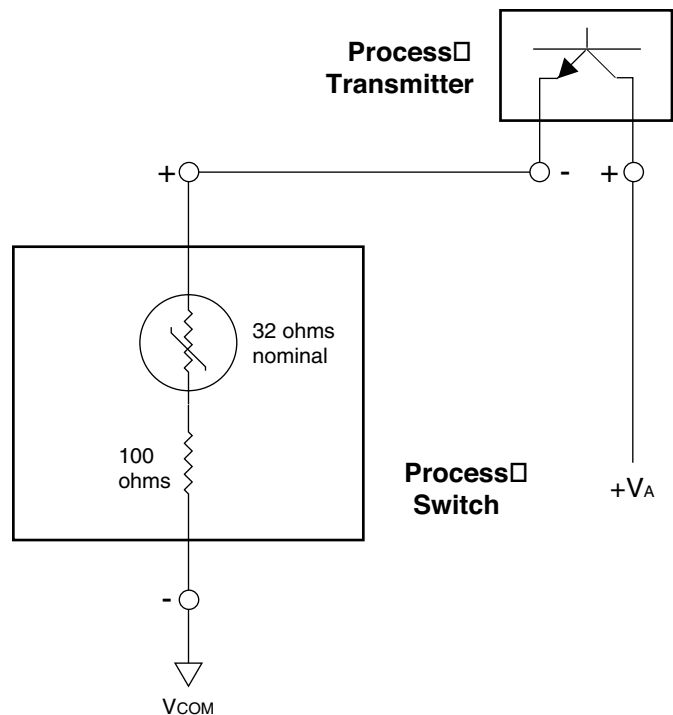

Dimensions

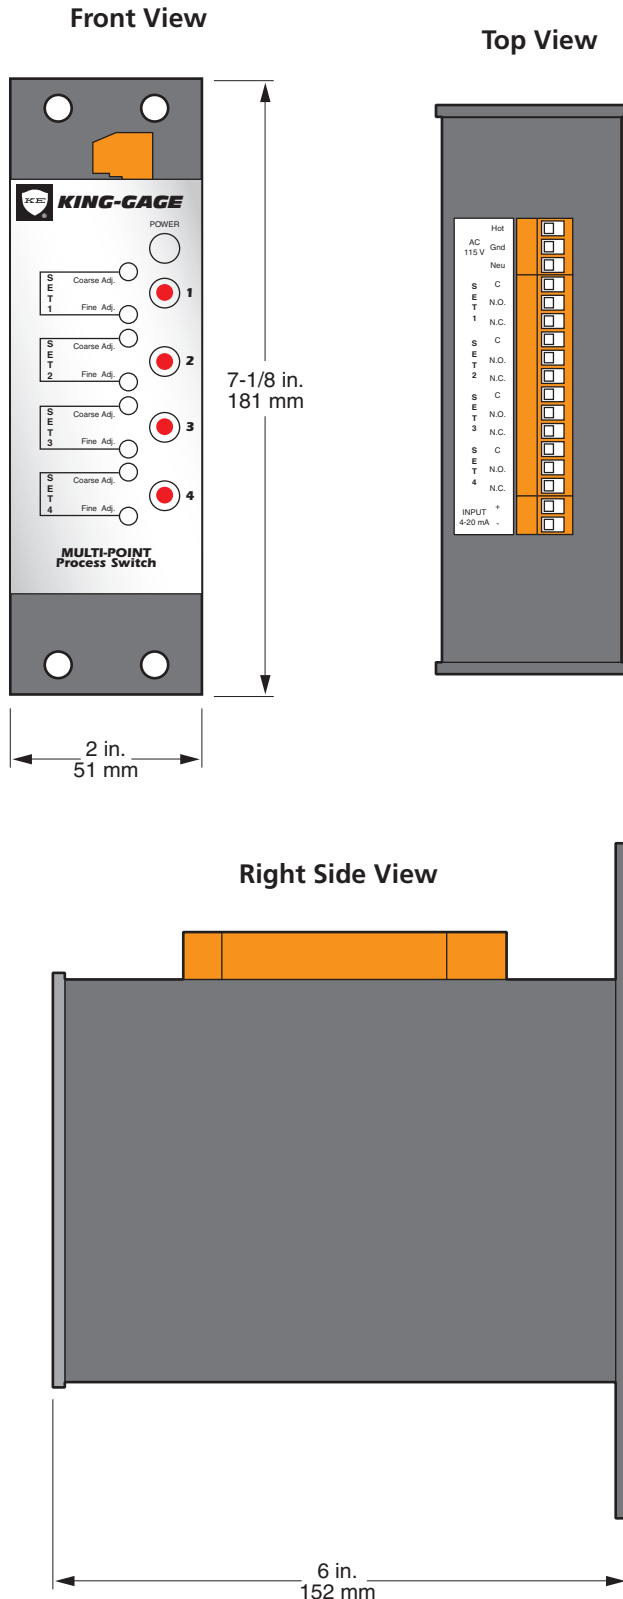

Specifications

Power Requirements

Nominal 115 Vac./60 Hz.
(unregulated)
3.45 Watt/0.03 Amp – fused @
0.1 Amp

Temperature Range (Environmental)

32° F to 158° F/0° C to 70° C – op-
erating
(-40° F to 158° F/-40° C to 70° C –
storage)

Input

dc current: 4-20 mA

Current Limiting (Overload)

70 mAdc maximum; automatic trip/
reset using PTC resistor (positive
temperature coefficient) circuit

Input Impedance

132 Ohm resistance (3 Vdc drop
@ 20 mAdc)

Set-Points

(4) four independent user set-
points; continuously adjustable
over full input range. Front panel
LED status indicator gives visual
confirmation when set-point value
has been exceeded.

Sensitivity (Adjustment)

Set-points can be adjusted to bet-
ter than 0.05% FS/0.008 mAdc

Repeatability

Set-point settings are repeatable
to better than 0.05% (long-term
repeatability: better
than 0.1% FS)

Deadband

Single deadband potentiometer
controls all four set-point settings.
Deadband adjustable from 1.0%-
12.5% FS. (Factory preset to 1%
FS.)


Output

(4) independent SPDT (form-C)
relays; maximum 3.0 Amp @ 115
Vac. or 24 Vdc (resistive). Rated for
100,000 cycles/life at rated load.

Size/Weight

7-1/8" (H) x 2" (W) x 6" (D)
22 oz./624 g.

Multi-Point™

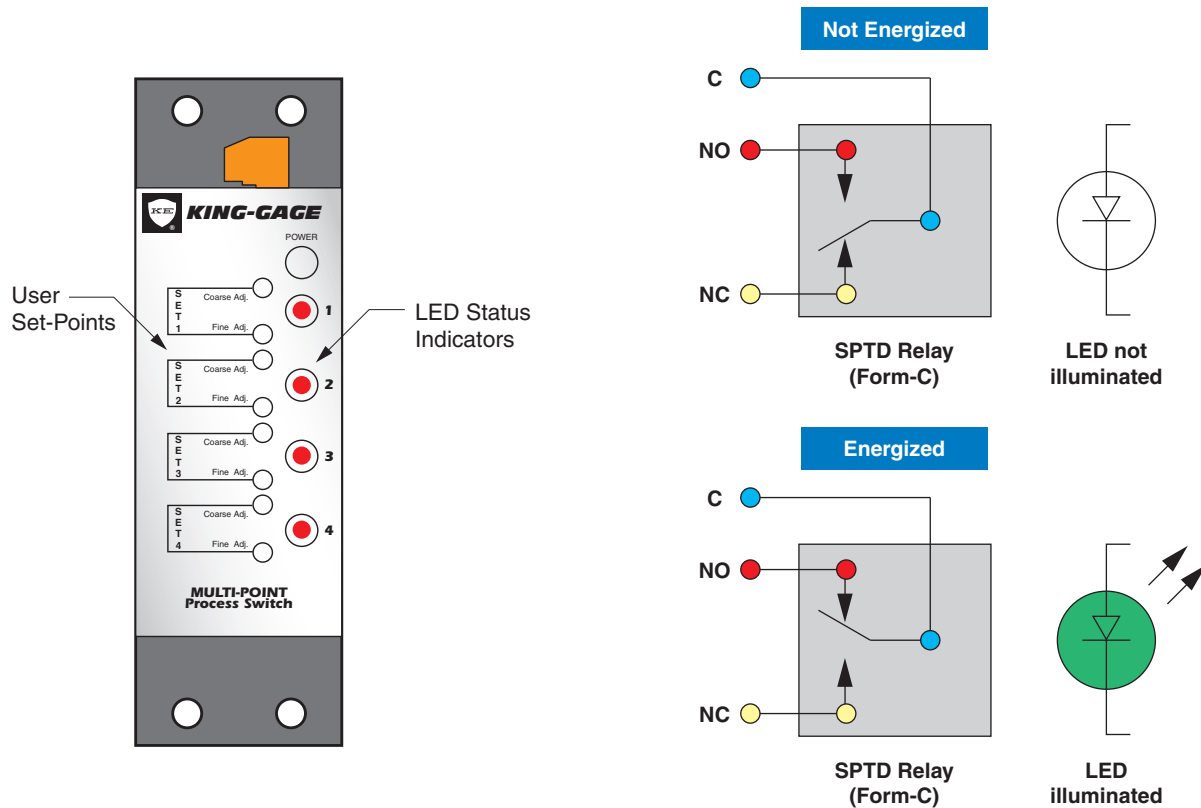

Adjustable Set-Points

The Process Switch has four (4) user set-points that can be adjusted to control continuous process operations, provide fail-safe limiting or alarm functions.

Front Panel - LED Status Indicators are located on the front panel of the Process Switch. Each of the four (4) LEDs correspond to "SET1, SET2, SET3, SET4" adjustments and output relays. When illuminated, the LED indicates that the set-point has been reached and corresponding relay energized.

SPDT (Form-C) Output Relays

Four (4) independent SPDT (single-pole/double-throw) relays are provided on the Process Switch. Form-C configuration includes normally-open (N.O.), normally-closed (N.C.) and common (C) relay contacts. Rated for 3.0 Amps maximum @ nominal 115 Vac.

Relay is energized when corresponding set-point milliamp value is exceeded.



8019 Ohio River Blvd, Newell, West Virginia 26050 U.S.A.
304-387-1200 ■ 800-242-8871 ■ FAX: 304-387-4417
www.king-gage.com ■ www.marshbellofram.com

KING-GAGE and the KE emblem are registered trademarks of King Engineering.

© 2011 ATC King Engineering. All rights reserved.

Specifications subject to change without notice.

LKe1400-10.pdf